PCT



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)					
(51) International Patent Classification 6:		(11) International Publication Number: WO 95/23013			
A63B 71/08, A61C 5/14	A1	(43) International Publication Date: 31 August 1995 (31.08.95)			
(21) International Application Number: PCTIAU95 (22) International Filing Date: 22 February 1995 (22) (30) Priority Data: PM 4055 23 February 1994 (23.02.94) (71) Applicant (for all designated States except US): FASI PTY. LTD. [AU/AU]; 500 Sandgate Road, Clayfield 4011 (AU) (72) Inventor; and (75) Inventor; and (AU/AU); 500 Sandgate Road, Clayfield, QLD 4011 (74) Agent: CUILLEN & CO.; 240 Queen Street, Brisbane 4000 (AU).	AU TCOTI d, QLI N, Bil I (AU)	CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KE, KZ, LK, LR, LT, LU, LV, MO, MG, MN, MW, MX, NL, NO, NZ, FL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UG, US, UZ, VV), European patient (AT, SE, CT, DE, MC, SE, SE, CR, CT, CM, GA, GN, MI, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published With international search report.			
(S. T. DEROUTE MATTERIAL POR MAINTAGUIAN	The .				
(54) Title: IMPROVED MATERIAL FOR MOUTHGUAR (57) Abstract A mouthguard (15) made from orally acceptable pi material. The mouthguard has a plurality of enclosed cavitie at spaced locations arranged in at least a substantial part mouthguard.	olastics es (11)	"\			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratie People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Kores	SI	Slovenia
CI	Côte d'Ivoire	KZ	Knzakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
cz	Czech Republie	LV .	Latvia .	TJ	Tajikistan
DE	Germany	MC	Monaco	TT .	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagasear	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

15

20

25

30

1

TITLE

"IMPROVED MATERIAL FOR MOUTHGUARDS"

FIELD OF THE INVENTION

THIS INVENTION relates to an improved material for mouthguards and to a mouthguard made from that material.

BACKGROUND OF THE INVENTION

The invention will be described by way of example with reference to mouthquards intended to be used while taking part in body contact sports. It should be appreciated that this is by way of example only and that the mouthquard of the invention may be used for therapeutic purposes also. For example the mouthquard may be used for treating temporomandibular disorders or the like.

DISCLOSURE OF THE INVENTION

Mouthguards are typically made from plastics material such as an ethylene vinyl acetate copolymer (EVA) and fall into three specific categories. The mouthguards are either stock products premoulded and made in a variety of sizes, home or self mouldable to suit the physical characteristics of the user or custom moulded to suit the characteristics of the user. The stock mouthguards are typically the cheapest and least effective in use while the custom moulded and shaped mouthguards are the most expensive and effective in their impact absorbent properties.

Little has been done to improve upon the characteristics and properties of mouthguards to enhance their effectiveness in protecting the teeth, jawbone and intraoral tissues from injury while the wearer takes part in body contact sporting activities such as boxing, football and the like.

German patent specification 4011204 discloses a
mouthquard material consisting of an EVA copolymer
material, polycaprolactone and colorants and perfumes and
PVA to reduce the softening point of the resultant
mouthquard for ease of manipulation and shaping.

10

15

20

25

30

35

2

United States patent specification 4920984 relates to a mouthguard material which may be custom shaped or moulded employing a teet impression cast pressed against softened thermoplastic sheet material which increases in thickness from one end to the other.

Australian patent specification 633269 discloses a mouthquard made from an EVA copolymer having a softening point higher than the normal temperature of an oral cavity but lower than the highest temperature that the oral cavity can endure so that the user may adapt the mouthquard to fit the mouth by biting onto it after it has been heated. The shaping procedure may be repeated if the shape or configuration of the teeth should change.

Earlier proposals as well providing materials enabling custom or self shaping of mouthquard have also suggested the use of other additives construction to enhance material of characteristics of the material. For example, United specification 4044762 patent suggested inclusion of not greater than 5% sodium fluoride. stannous fluoride or sodium fluorosilicate in the material of construction to simultaneously provide prophylactic treatment of the teeth.

There has been little activity in the construction of mouthguards in an attempt at enhancing the impact absorption properties other than the change in thickness referred to in United States Patent 4920984.

. It is an object of the invention to provide an improved mouthguard material and a mouthguard made from that material which provides enhanced impact absorbent properties.

According to one aspect, the invention provides a mouthguard material made of orally acceptable plastics material, the mouthguard material having a plurality of enclosed cavities therein at spaced locations arranged in at least a substantial part of the material.

The enclosed cavities may be of any suitable

10

15

20

25

30

35:

size and shape. For example, the cavities may have irregular shapes or regular shapes such as spherical or cylindrical shapes. The cavities need not be regularly spaced. For example, the cavities may occur randomly spaced throughout the material. The cavities in the material need not all be the same size or shape. However, it is preferred that the cavities employed in the material all be similar in size and shape.

The enclosed cavities may be present as voids in the material. If desired, the cavities may be filled with gas or liquid to enhance the impact absorption characteristics of the material. In one embodiment, the cavities may be filled with a synthetic material different from the substance from which the mouthguard material is predominantly made.

It is preferred that the mouthguard material be made from an ethylene vinyl acetate copolymer (EVA) substitute or equivalent. Additives may be added to the EVA to provide special properties for the mouthguard material. Preferably a copolymer of ethylene and about 20% by weight vinyl acetate is employed. Colorants, perfumes and softening acetats may also be added.

According to another aspect, the invention provides a mouthguard made of orally acceptable plastics material and having a plurality of enclosed cavities therein at spaced locations arranged over at least a substantial part of the mouthguard.

One way in which the cavities may be formed is by employing an inner layer of sheet material in which a plurality of spaced apertures are formed and an upper and a lower layer of sheet material bonded to opposed sides of the inner layer to thereby close off the apertures to form the enclosed cavities. Other ways of forming the cavities may also be employed.

DISCLOSURE OF THE DRAWINGS

Preferred aspects of the invention are described with reference to the drawings in which:

Figure 1 is a spectral analysis of a preferred

15

20

25

30

.

material from which the mouthguard of the invention may be made:

Figure 2 is a graph showing comparative test results for materials from which mouthguards according to the invention may be made and standard mouthguard material:

Figure 3 is a plan view of a blank of material from which a mouthguard in accordance with the invention may be made;

10 Figure 4 shows a perspective view of a mouthguard made from the blank of Figure 3;

Figure 5 is an exploded perspective view of a cast and the mouthguard shown in Figure 4; and

Figure 6 is a graph of a thermal gravimetric analysis of the material identified by Figure 1.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1 is a Perkin-Elmer spectral trace which identifies the preferred material from which mouthquards according to the invention may be made. The material is sold under the trade mark STAY-GUARD and is made by World Wide Dental Inc in Clearwater, Florida, United States of America. Figure 6 shows a graph of a thermal gravimetric analysis of this material. The material is an ethylene vinyl acetate copolymer with 20% by weight vinyl acetate.

The mouthguard may be pre-moulded and thus be of the more basic type of mouthguard previously mentioned. Alternatively the mouthguard may be user mouldable to suit the physical characteristics of the user. In yet another alternative, the mouthguard material of the invention may be custom moulded using a cast or impression taken of the user's physical characteristics.

Figure 2 is a graph showing impact results for the preferred EVA material identified by the spectral analysis shown in Figure 1 but not having voids or cavities in accordance with the invention. The sample identified as standard is such an EVA material.

Sample 1 is made from the same EVA material but

PCT/AU95/00083

10

15

20

25

30

has enclosed cavities formed in it. The cavities have a size of 2 x 2 mm and are separated by 2 mm wide borders. Sample 2 once again is made of the preferred EVA material and the cavities are 2 x 2 mm in size and separated by 1.00 mm borders. Sample 3 is made from the preferred EVA material and has cavities 3 x 3 mm in size separated by 1 mm borders.

The samples tested had a nominal thickness of about 4 mm and were all of the same dimensions. minimal wall thickness may be provided on opposite side faces of the material overlying the cavities. force was applied to each of the sample materials and the force transmitted through the samples is shown in the graph. Sample 3 provided the greatest impact absorbing properties.

Figure 3 shows a blank of material from which a mouthguard in accordance with the invention may be made. The blank 10 is in the general shape necessary for a mouthquard and may either be premoulded into standard sizes or softened and moulded to conform to the shape required by a user.

Not all of the blank 10 is provided with enclosed cavities shown generally by the numeral 11. These cavities 11 are confined within a border 12 such that when moulded the area defined by the border 12 extends over the ends of the teeth of the user and substantially over both sides of the teeth. A peripheral zone 13 is free of cavities.

Figure 4 is a perspective view of a mouthguard 15 made from the blank like that of Figure 3. The view shown is above looking into the valley within which teeth are received by the mouthguard. The cast 16 shown in Figure 5 has been used as a mould for forming the mouthquard 15 and depressions 17 into which teeth project 35 are clearly visible. Portions of the zone 13 may be trimmed away as required or deemed necessary.


Figure 5 shows a view of a cast on which a mouthquard may be formed. The cast 16 is representative

of an upper set of teeth 18. A blank of material in accordance with the invention is moulded into a mouthquard 19. Enclosed cavities 20 extend over a portion of the guard 19 and at least cover or extend over the teeth when in use. A palate portion 21 shown in this figure is trimmed in the finished mouthquard 15 shown in Figure 4. Likewise the free edge 22 may be trimmed to suit to provide a recess 23 (see Figure 4) to accommodate the frenum on the inner surface of the upper lip of the wearer of the guard.

CLAIMS: -

- 1. A mouthguard material made of orally acceptable plastics material, the mouthguard material having a plurality of enclosed cavities therein at spaced locations arranged in at least a substantial part of the mouthguard material.
- 2. The mouthguard material of Claim 1 wherein the enclosed cavities are regularly spaced.
- 3. The mouthguard material of Claim 1 wherein the 10 cavities have a regular shape.
 - The mouthguard material of Claim 1 wherein the cavities are all of a similar size and shape.
 - 5. The mouthguard material of Claim 1 including a peripheral zone free of said enclosed cavities.
- 15 6. The mouthguard material, of any one of Claims 1 to 5 made from an ethylene vinyl acetate copolymer.
 - 7. The mouthguard material of Claim 6 wherein he ethylene vinyl acetate copolymer includes at least 20% by weight vinyl acetate.
- 20 8. The mouthguard material of Claim 1 wherein the cavities are filled either with a liquid or a gas.
 - 9. The mouthguard material of Claim 1 wherein the cavities are filled with a synthetic material different from the orally acceptable plastics material.
- 25 10. A mouthquard made of an orally acceptable plastics material and having a plurality of enclosed cavities therein at spaced locations arranged in at least a substantial part of the mouthquard.
- 11. The mouthguard of Claim 10 wherein the enclosed 30 cavities are regularly spaced.
 - 12. The mouthguard of Claim 10 wherein the enclosed cavities have a regular shape.
 - 13. The mouthguard of Claim 10 wherein the enclosed cavities are all of a similar size and shape.
- - 15. The mouthguard of any one of Claims 10 to 14 made from an ethylene vinyl acetate copolymer.

- 16. The mouthguard of Claim 15 wherein the ethylene vinyl acetate copolymer includes at least 20% by weight vinyl acetate.
- 17. The mouthguard of Claim 10 wherein the cavities 5 are filled either with a liquid or a gas.
 - 18. The mouthguard of Claim 10 wherein the cavities are filled with a synthetic material different from the material from the orally acceptable.

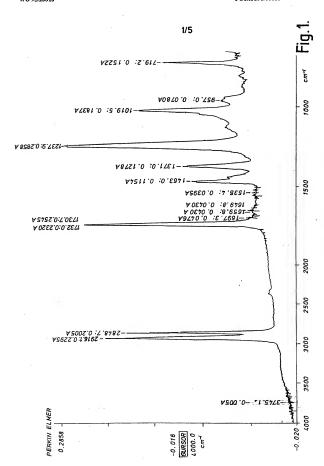






Fig.2.







WO 95/23013 PCT/AU95/000

4/5

Fig.5.



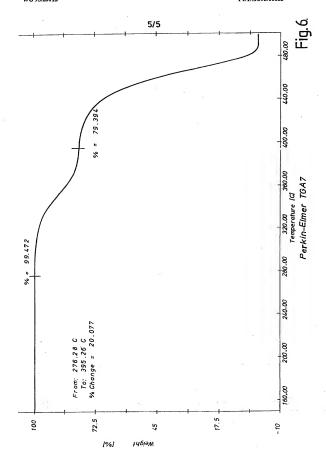

INTERNATIONAL SEARCH REPORT

Α.	CLASSIFICATION OF SUBJECT MATTER	
Int. Cl.6	A63B 71/08, A61C 5/14	

According to International Patent Classification (IPC) or to both national classification and IPC

FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols) IPC A63B 71/08, A61C 5/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU; as above

Electronic data base consulted during the international search (name of data base, and where practicable, search terms used)

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	JP,A, 05-300915 (MOLTEN CORP) 16 November 1993 See ABSTRACT	Ali
A	EP.A. 490137 (GORE & ASSOC GMBH) 17 June 1992 See entire document.	1 to 9
A	JP,A, 04-028381 (MITSUBISHI PETROCH KK) 30 January 1992 See Abstract	Ali
Α	JF,A, 03-244480 (WORUTEN KK) 31 October 1991	Ali

* Special categories of cited documents : A" document definite, the general tasts of the art which is considered to be of patentials reference categories. The content of	"I" later document published after the international filing date or priority date and not no conflict with the application but cled to underestud the application but cled to underestud the conflict of the properties of the conflict of the
Date of the actual completion of the international search	Date of mailing of the international search report
19 May 1995	13 JUNE 1995 (13.06.95)
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION FOR BOX 20' WODEN ACT 2606 AUSTRALIAN Factimile No. 06 2853929	Authorized officer John Jrombon J W THOMSON Telephone No. (96) 2832214

INTERNATIONAL SEARCH REPORT

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.			
A	CA,A, 2024799 (ADELL LS) 25 January 1991 See Abstract.	All			
A	FR,A, 2576798 (SAMETZKY S) 8 August 1986 See entire document.	All			
A	SE,A, 8404661 (WALLNER P) 17 March 1985 See Abstract.	All			
A	US,A, 3319626 (DAVID K. LINDSAY) 16 May 1967 See entire document.	All			
A	US,A, 3247844 (Hyman H. BERGHASH) 26 April 1966 See entire document.	All			
A	US,A, 3207153 (Sol GOLDSTEIN) 21 September 1965 See entire document.	All			
		•			
	*				

INTERNATIONAL SEARCH REPORT

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

	Patent Document Cited in Search Report				Patent Family	Member	
EP	490137	CA US	2057194 5361410	DE	9016713	FI	915788
CA	2024799	US	5082007				
					•		-
							END OF ANNEX